

Eco-Performance Pre-Stretch®



The **Eco-Performance Pre-stretch film** produced by **Efekt Plus** is the world's first pre-stretched film produced directly on the production line.

Pre-stretch is produced in a version with and without overlaps. The advanced technological process and carefully selected raw materials allow us to offer a product with high strength and performance parameters.


Pre-stretch	Thickness	6-12 µm*
	Width	430**, 440, 450 mm
	Wrap	400 - 800 meters
	Colour	transparent

*recommended thickness 7-9 µm
**standard roll width

Features

A typical single roll of Pre-Stretch film with a thickness of 8 µm is as much as 600 m of material. **Pre-stretch is made up of 13 layers.**

Compared to a standard stretch film, the **wrapping costs are reduced by up to 40%.**

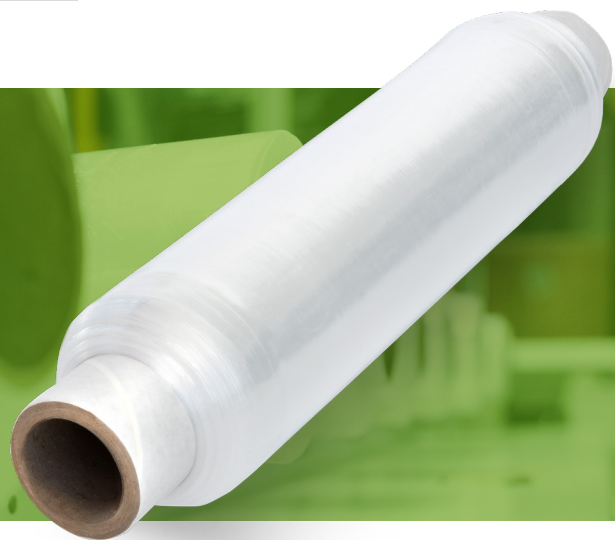

Why pre-stretch?

High load stability
the flexibility of the film and the low stresses balance and secure the load. Load stabilization is comparable to the POWER class film load stabilization.

Tear resistance
the pre-stretched film has 13 layers.

Easy to use
requires less force to stretch the film and wrap the goods, saving the worker time and energy.

Pro-ecological product
the use of pre-stretch film guarantees a reduction in film consumption which equates to less waste.

